




BOX GIRDER

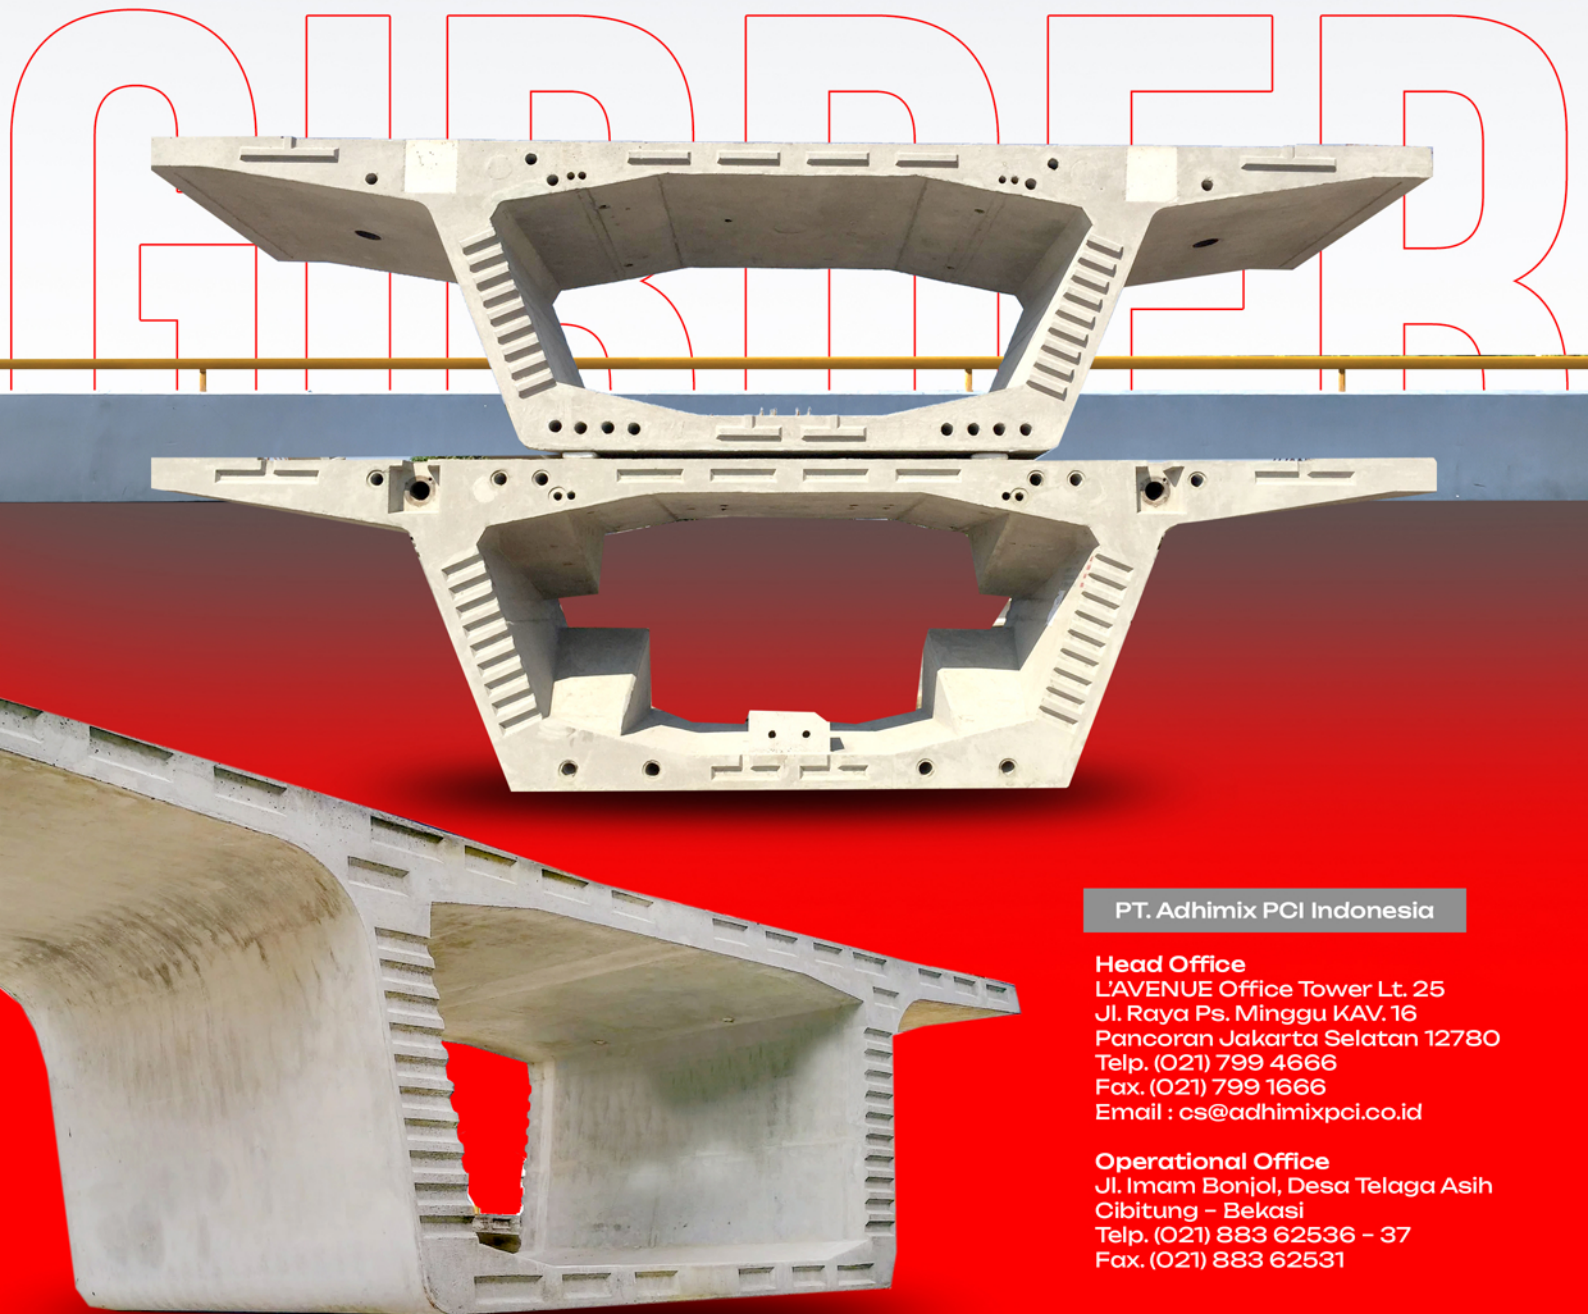

PT. Adhimix PCI Indonesia

Head Office
L'AVENUE Office Tower Lt. 25
Jl. Raya Ps. Minggu KAV. 16
Pancoran Jakarta Selatan 12780
Telp. (021) 799 4666
Fax. (021) 799 1666
Email : cs@adhimixpci.co.id

Operational Office
Jl. Imam Bonjol, Desa Telaga Asih
Cibitung - Bekasi
Telp. (021) 883 62536 - 37
Fax. (021) 883 62531



1500 178

www.adhimixpciindonesia.co.id




adhimixpci



Technical Specification :

Type	Depth (m)	Segment Length	Span	Ba	Bb	tsa	tsb	t Web	Area Mid.	Weight
	H	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m2)	(ton/m)
A	2.4 to 3.4	2.4 to 2.9	70 to 80	9.0	4.05 to 3.208	0.250	0.25 to 1.25	0.40	5.996 to 10.452	19.93
B	2.2	2.0 to 2.95	35	10.0	4.05	0.250	0.33	0.40	5.909	14.77
B	2.4	2.4 to 2.55	40 to 50	9 to 11.0	4.05	0.250	0.25	0.40	5.996	14.99
B	2.6	2.0 to 2.75	50	12.5	4.80	0.225	0.20	0.28	5.826	14.57

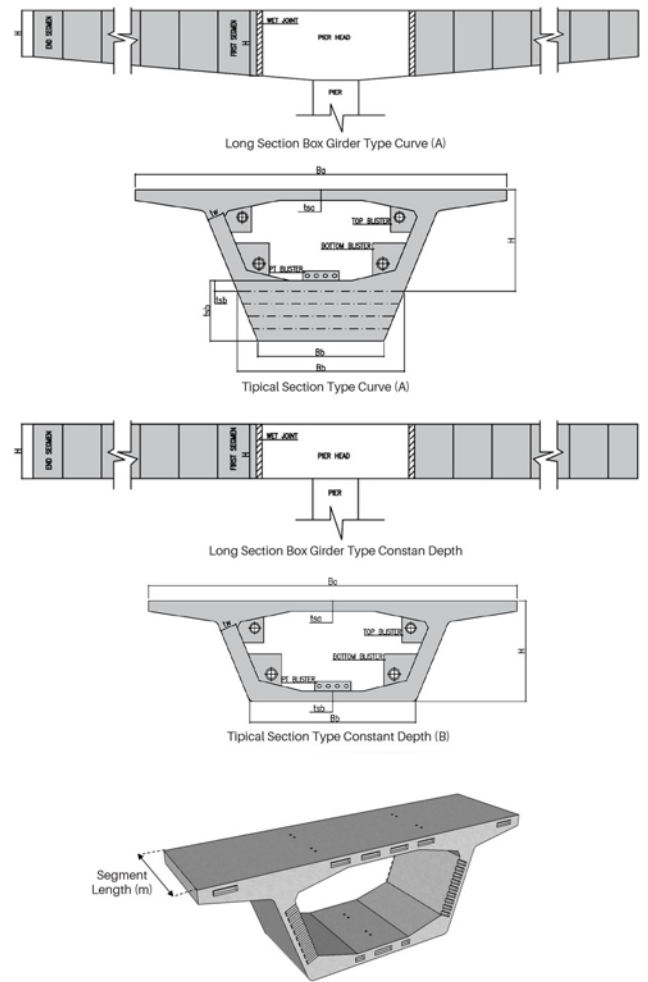

Specification	: Prestressed Concrete
Prestressed System	: Post Tensioned (External or Internal Cable)
Concrete Compressive	: 40 to 60 MPa
Strength	: PC Strand
Prestressed Rebar	: Deform fy = 420 MPa; Plain fy = 280 MPa
Non Prestressed Rebar	: Span By Span or Balanced Cantilever
Launching System	: Segmental



Scan Here
Other Product

